



Big Dutchman®



Vista 360


The feed pan without a grille for successful broiler production

Vista 360: ideally suited for growing broilers

Vista 360 is a feed pan for broiler production developed by Big Dutchman. The pan not only satisfies the needs of day-old chicks but also those of heavy birds during the final grow-out period. The following points are essential for success-

- ful broiler rearing and growing:
- easy access to feed at any age
 - minimum feed wastage
 - no breast bruises in the final grow-out period
 - simple, thorough cleaning

Vista 360 can be supplied with a tilting mechanism as an optional extra. With this feature, the pan line can easily be tilted by more than 90° for cleaning. Do not hesitate to get in touch with one of our experts for a detailed consultation.

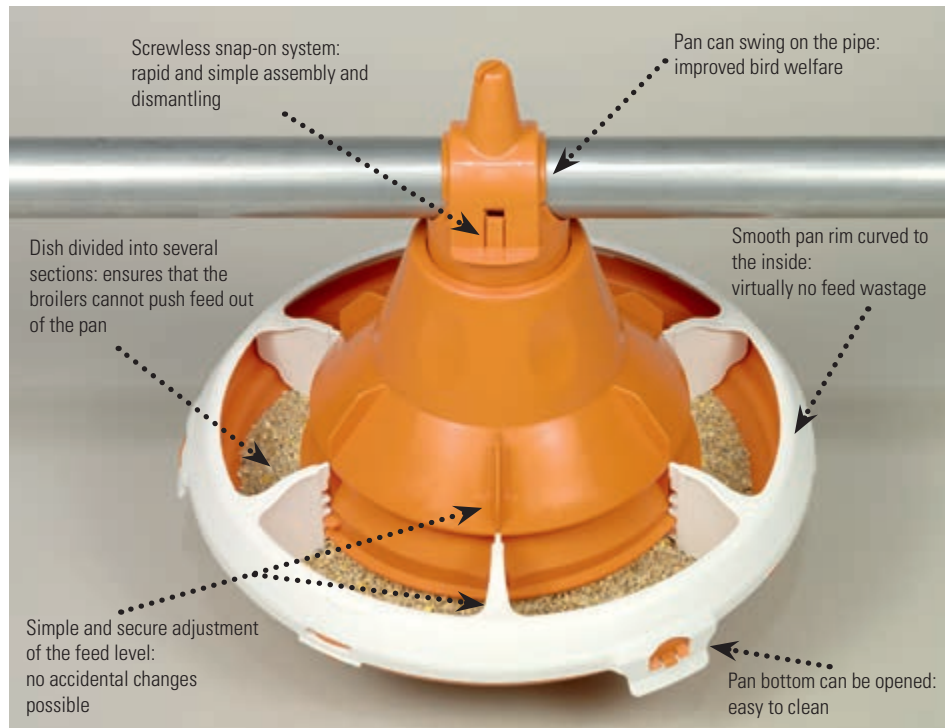

ADVANTAGES

- ✓ the innovative 360° flooding mechanism ensures a high feed level in the pan for an ideal start of the day-old chicks;
- ✓ the flooding mechanism closes automatically when the pans are lifted, lowering the feed level and reducing feed wastage to an absolute minimum;
- ✓ the pan has no grille so feed is easily accessible for broilers of every age;
- ✓ the smooth, curved pan rim prevents bruises in the final grow-out period;
- ✓ use of high-quality, UV-resistant plastic;
- ✓ thorough cleaning with a high-pressure washer is possible.

Reference values and technical specifications

Broiler growing – ad lib feeding

- 1 feed line per 4 to 5 m house width, i.e.
- 9 to 12 m house width → 2 feed lines
- 12 to 15 m house width → 3 feed lines
- 15 to 18 m house width → 4 feed lines

Final weight birds/Vista 360

up to 1.5 kg	approx. 117
up to 2.0 kg	approx. 94
up to 2.5 kg	approx. 79
up to 3.0 kg	approx. 70
up to 3.5 kg	approx. 63

- Feed hopper
- Extension for feed hopper
- Maximum system length
- Feed pipe with 2, 3, 4 holes
- Total length
- Drive unit with gear motor

capacity approx. 115 L / 75 kg
 capacity approx. 38 L / 25 kg
 150 m
 diameter 45 mm
 3000 mm + sleeve coupling
 0.37/0.55 kW, 230/400 V,
 50/60 Hz, 3 phases, 325 rpm
 special voltages upon request
 approx. 450 kg/h
 up to 4 mm
 central ceiling winch,
 manual or with motor

These figures are average values and may vary depending on the breed, stocking density and climate. Additionally, regional reference values must be considered.

- Conveying capacity
- Pellet size
- Suspension



Big Dutchman

Europe, Middle East & Africa:
Big Dutchman International GmbH
 P.O. Box 1163 · 49360 Vechta, Germany
 Phone +49 (0) 4447 801 0
 big@bigdutchman.de
 www.bigdutchman.de

USA: Big Dutchman, Inc.
 Phone +1 616 582 4000 · bigd@bigdutchmanusa.com
 www.bigdutchmanusa.com

Brazil: Big Dutchman (Brasil) Ltda.
 Phone +55 16 2108 5310 · bdbr@bigdutchman.com.br
 www.bigdutchman.com.br

Russia: 000 "Big Dutchman"
 Phone +7 495 2295 161 · big@bigdutchman.ru · www.bigdutchman.ru

Asia/Pacific: BD Agriculture (Malaysia) Sdn. Bhd.
 Phone +60 3 334 83 555 · bdasia@bigdutchman.com · www.bigdutchman.com

China: Big Dutchman (Tianjin) Livestock Equipment Co., Ltd.
 Phone +86 10 6476 1888 · bdcnsales@bigdutchman.com
 www.bigdutchmanchina.com